

PREMIUM P CEILING SOUNDPROOFING FRAME SYSTEM



SYSTEM
THICKNESS
93 mm




GENERAL CONSTRUCTION
SOUND REDUCTION INDEX
Rw = 72 dB



AIRBORNE
SOUND REDUCTION
IMPROVEMENT INDEX
▲ Rw = 21 dB



IMPACT
SOUND REDUCTION
IMPROVEMENT INDEX
▲ Lnw = 18 dB

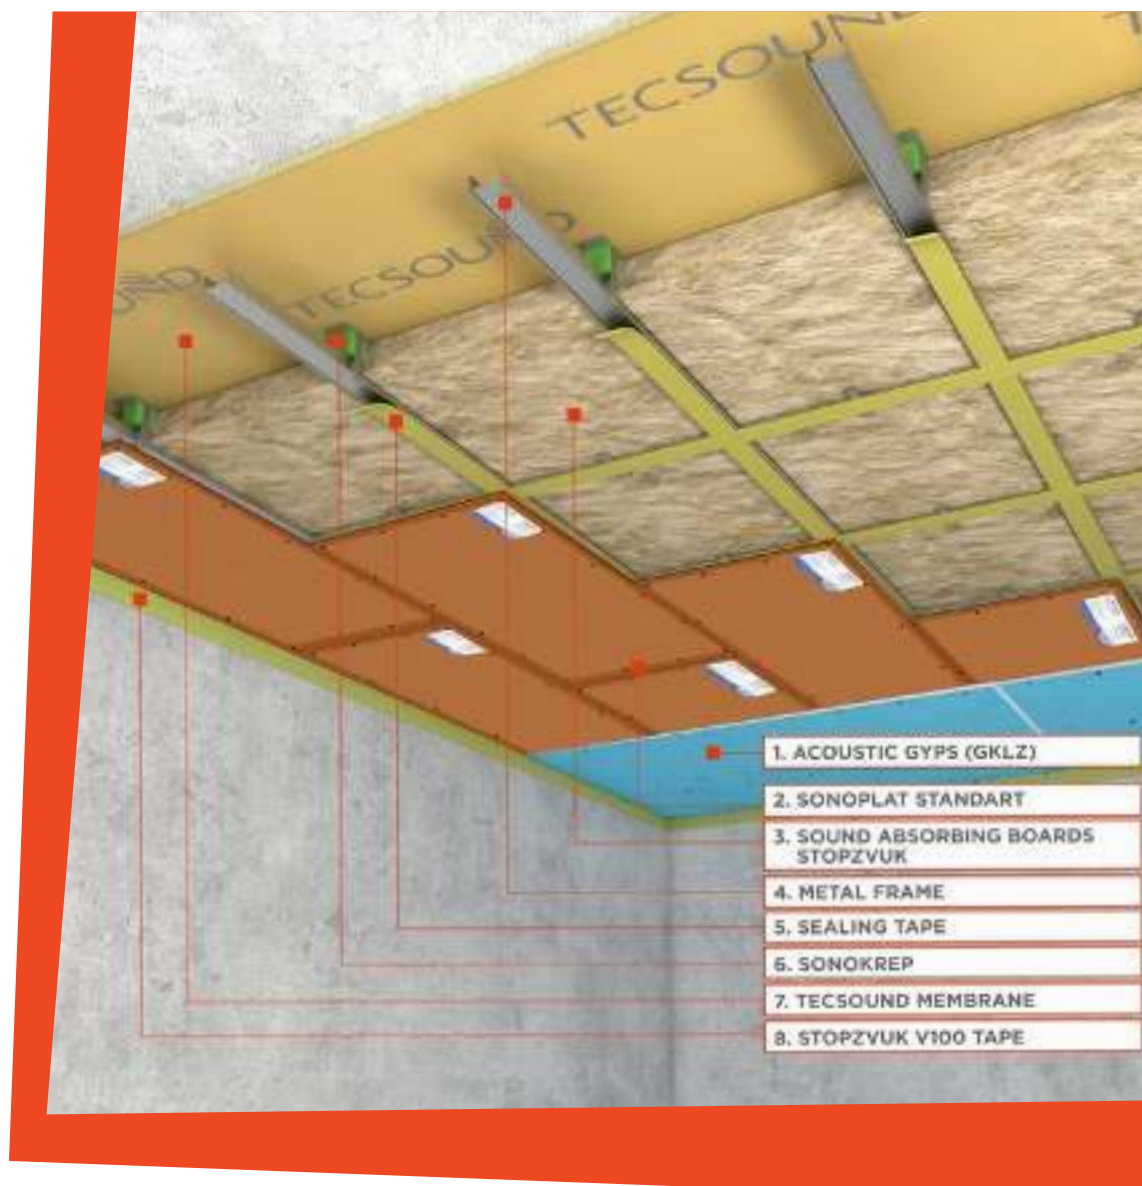

1. ACOUSTIC GYPS (GKLZ)

2. SONOPLAT STANDART

3. SOUND ABSORBING BOARDS
STOPZVUK

4. METAL FRAME

5. SEALING TAPE

6. SONOKREP

7. TEC SOUND MEMBRANE

8. STOPZVUK V100 TAPE

DESCRIPTION

The third-level soundproofing system is the most effective. It may be used in multi-apartment residential buildings and apartments of enhanced comfort, in special purpose facilities (recording studios, conference rooms, movie and concert halls, restaurants, karaoke-bars, etc.). The system reduces all frequency range sound transmission through walls and floors and ceilings and makes the sounds inaudible for humans (at the sound volume of up to 80-85 dB). The main system elements are composite soundproofing Tecsound membranes and Sonoplat panels.

COMPONENTS

Material	Coefficient per 1 m ² *
SonoPlat Standard Plus Panel (1.2m x 0.8m x 12mm) 0.96m ²	1,0938
Tecsound FT 55 Membrane (5.5m x 1.2m x 13mm) 6.6m ²	0,1591
StopZvuk BP Premium Sound Absorbing Board (1m x 0.6m x 50mm) 4pcs., 2.4m ²	0,4167
Sonokrep EP20 Anti-Vibration Hanger	3,3000
Sonetic Vibroacoustic Sealant, 310ml	0,2500
Bautger Adhesive, 10 l / 8kg container	0,0500
Disk-shaped Dowel Nail (10mm x 70mm) 100 pcs.	0,0500
SonoPlat Band (40m x 50mm) w/o logo	0,0769
Vibration Cushioning Band V-100 (30m x 100mm x 4mm)	0,0450
Reinforced Tape (50m x 50mm)	0,0380
Tecsound Band (6mm x 50mm x 2,6mm)	0,5500
AcousticGyps PPN Reinforced Profile 27/28, 3m	0,4500
AcousticGyps PP Reinforced Profile 60/27, 3m	1,2000
AcousticGyps Soundproofing Gypsum Board (2m x 1.2m x 12.5mm) 2.4m ²	0,4583
Self-Threading Screw TC-M 3.5x25 (500 pcs.)	0,0500
Self-Threading Screw TC-XTN 3.9x38 (500 pcs.)	0,0800
Self-Threading Screw TC-MM 4.2x13 (1000 pcs.)	0,0150
AcousticGyps single-level connector (Crab) for PP 60/27	4,0000
AcousticGyps extension for PP 60/27	0,6000
Dowel Nail TC-DG 6/60 (100 pcs.)	0,0700

*Coefficients are advisory in nature, calculated empirically